




# Commercial Assured Access



## Defense Rail Features

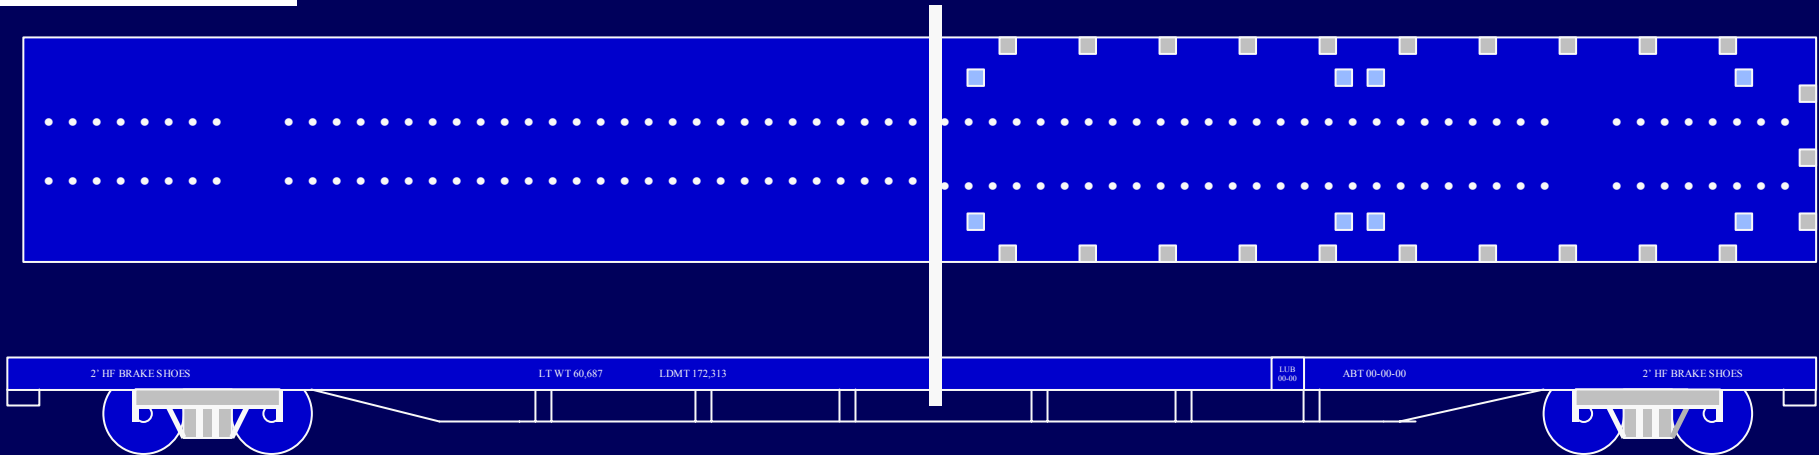

### MINIMUM ARMY REQUIREMENTS

- BASED ON TTDX DESIGN
- 220,000 OR 263,000 OR 286,000 LBS. LOAD LIMIT
- APPROXIMATELY 180 ANCHOR HOLES
- MAXIMUM OF 32 ANCHOR HOLES IN USE AT ONE TIME
- CHAINS WILL BE PURCHASED BY DOD SHIPPERS AND STORED AT LOADING POINTS

### MUTIPLE COMMERCIAL FEATURES

- BASED ON TTX EXPERIENCE
- 286,000 LBS. LOAD LIMIT
- APPROXIMATELY 180 CHAIN ANCHOR HOLES
- EQUIPPED WITH 36 CHAINS IF IN VEHICLE SERVICE
- 16 INTERBOX CONNECTOR (IBC) ANCHOR HOLES SPACED TO HANDLE 20', 40' AND 45' ISO CONTAINERS
- 20 STAKE POCKETS EACH SIDE AND 3 EACH END

### COMMON CHARACTERISTICS

- NOMINAL 89 FOOT LENGTH OVER END SILLS
- PLATE C CLEARANCE DIAGRAM
- 15 INCH END-OF-CAR CUSHIONING
- CAPABLE OF BEING LOADED FROM END OR SIDE RAMPS
- NO PROJECTIONS ABOVE TOP OF DECK
- ALL TIEDOWNS TO BE ANCHORED TO HOLES IN DECK
- 12" ANCHOR HOLE SPACING IS MINIMUM DISTANCE BETWEEN WINCH ANCHORS USING TOOTHED TRACK DESIGN
- ANCHORS AT BOTH ENDS OF CHAINS TO SECURE UNUSED CHAINS; NO NEED FOR STORAGE TROUGH